Applying the Tree Trainer to your bent tree.

1

Your bent tree can be straightened easily with the Tree Trainer.

2

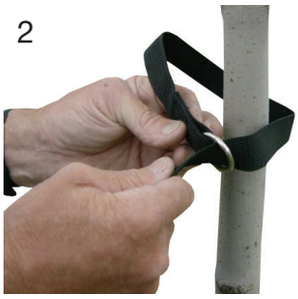

Place long, top strap around tree and go through ring as shown.

3

Insert strap through the ring once, then wrap around the tree again, and insert through ring a second time.

4

Once through, take the slack out and pull tight.

5

Feed the long, top strap through the bottom side of cam buckle the proper way.

6

Push the long, top strap through the bottom side of cam buckle so the teeth can grip the strap.

7

Place the Tree Trainer with the insert pad against the tree at the bend or bow position.

8

Second strap, bottom, should be installed (referring to the above example of the top strap being installed).

9

Place long, bottom strap through bottom side of cam buckle the proper way.

10

Push long, bottom strap through bottom side of cam buckle and pull through so teeth can grip strap.

11

Fold the top and bottom straps and tie off with a tie strap to eliminate excess material.

12

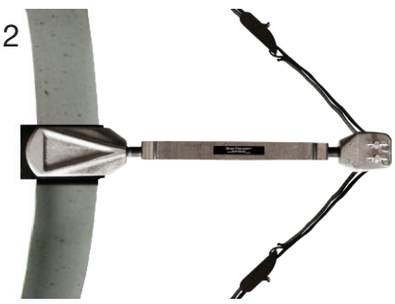

Completed! The Tree Trainer placed on a tree properly with the turnbuckle adjusted to secure itself independently.

 © 2012 Roy Enterprises L.L.C. All Rights Reserved.